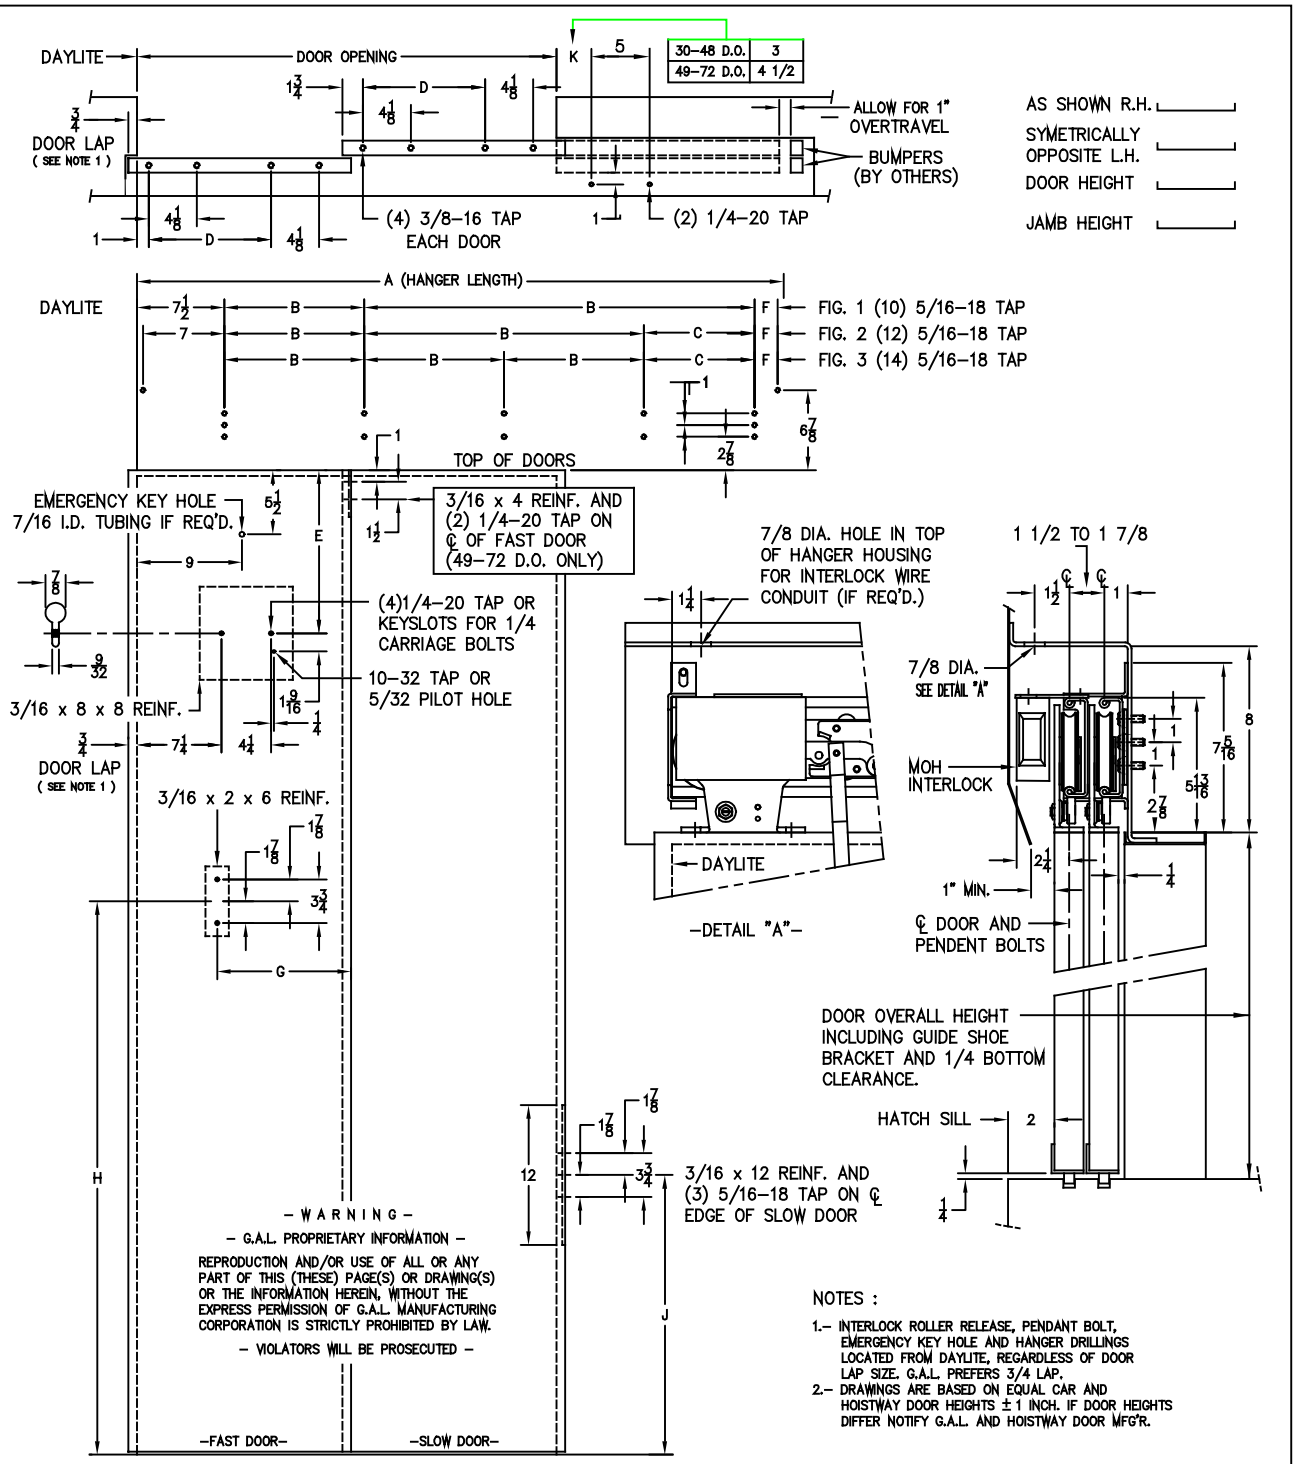

NOTES :

1.– INTERLOCK ROLLER RELEASE, PENDANT BOLT, EMERGENCY KEY HOLE AND HANGER DRILLINGS LOCATED FROM DAYLITE, REGARDLESS OF DOOR LAP SIZE. G.A.L. PREFERS 3/4 LAP.

2.– DRAWINGS ARE BASED ON EQUAL CAR AND HOISTWAY DOOR HEIGHTS ± 1 INCH. IF DOOR HEIGHTS DIFFER NOTIFY G.A.L. AND HOISTWAY DOOR MFG'R.

(36 x 84 D.O. SHOWN)

DOOR OPNG.	A	B	C	F	D	E	DOOR OPNG.	G	H	J	DOOR OPNG.	G	H	J	DOOR OPNG.	G	H	J	DOOR OPNG.	G	H	J
69–72	106	24 (FIG. 3)	24	2	26½	34	45	14	50½	25	61	19	69	33½	66	16½	69	33½	71	18	72	35
65–68	100	24 (FIG. 3)	12	8	24½	30	44	11	46½	23½	60	14½	70	33½	65	17	69	33½	70	18½	72	35
61–64	94	24 (FIG. 3)	12	2	22½	30	43	11½	46½	23½	59	15	70	33½	64	17½	69	33½	69	19	72	35
57–60	88	24 (FIG. 2)	24	8	20½	26	42	12	46½	23½	58	15½	70	33½	63	18	69	33½	68	19½	72	35
53–56	82	24 (FIG. 2)	24	2	18½	26	41	12½	46½	23½	57	16	70	33½	62	18½	69	33½	67	20	72	35
49–52	76	24 (FIG. 2)	12	8	16½	22	40	9½	47½	24	56	16½	70	33½	DOOR OPNG.	G	H	J	DOOR OPNG.	G	H	J
47–48	72	24 (FIG. 2)	12	4	16½	22	39	10	47½	24	55	17	70	33½								
45–46	70	24 (FIG. 2)	12	2	16½	22	38	10½	47½	24	54	11½	71	35								
43–44	66	22 (FIG. 2)	12	2	14½	18	37	11	47½	24	53	12	71	35								
41–42	64	24 (FIG. 1)		8	14½	18	36	11½	47½	24	52	12½	71	35								
39–40	60	24 (FIG. 1)		4	12½	(40) 18 / (39) 14	35	9½	42	21½	51	10½	58	29								
37–38	58	24 (FIG. 1)		2	12½	14	34	10	42	21½	50	11	58	29								
35–36	54	22 (FIG. 1)		2	10½	14	33	10½	42	21½	49	11½	58	29								
33–34	52	18 (FIG. 1)		8	10½	14	32	11	42	21½	48	12½	50½	25								
31–32	48	18 (FIG. 1)		4	8½	14	31	11½	42	21½	47	13	50½	25								
30	46	18 (FIG. 1)		2	8½	14	30	12	42	21½	46	13½	50½	25								

DIMENSION TABLE

DIMENSION TABLE

G.A.L. MANUFACTURING CORP.
50 E. 153rd STREET BRONX, N.Y. 10451

HATCH REINFORCEMENT AND DRILLINGS TWO SPEED
TYPE "A" HANGER WITH SPRING DOOR CLOSER 30–72 D.O.

SCALE	3/32	DATE	11–11–94
DWG. BY		8242	
REV. No.			