


MOVFR II

Door Operator

PERFORMANCE THAT'S TOUGH TO BEAT

Intelligent design.
Legendary reliability.

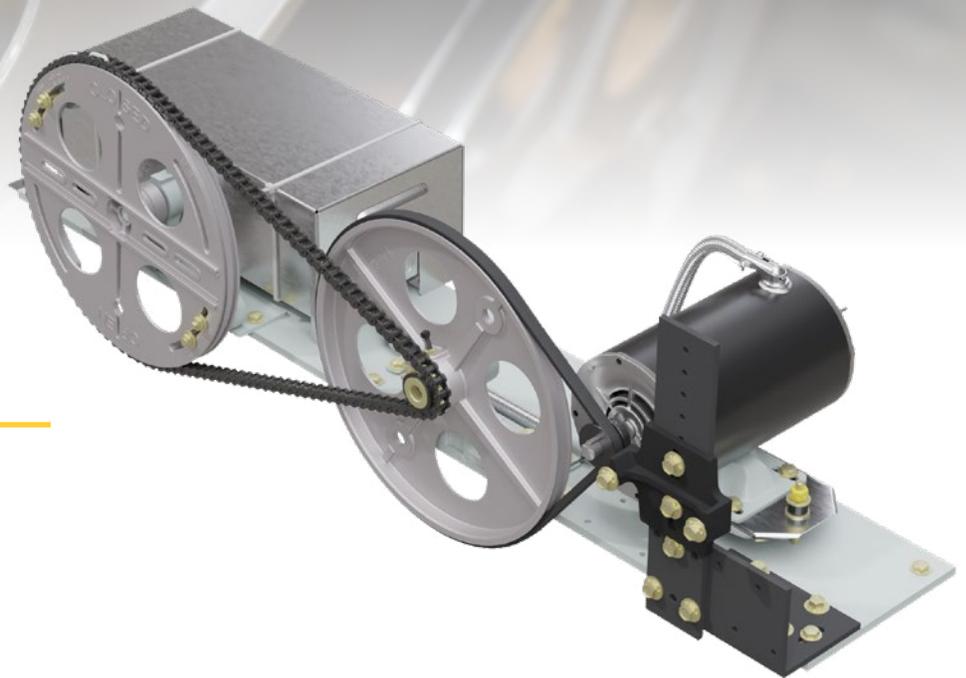

BENEFITS

THE SOLID ANSWER FOR DEMANDING APPLICATIONS:

- Heavy-duty 1/2 HP, 230 volt AC motor (3-phase, 60 Hz, 1140 RPM) can quietly handle any application
- Handheld parameter management enables replicate door for fast and easy motion tuning with true 'Plug-and-Play' door detector installation
- PC board with a variable frequency (VVVF) closed loop drive provides consistent door timing with no need for an encoder
- Programs quickly and easily (parameter unit and device work together)
- Adapts to all OEM and independent cabs and doors with optical closed loop feedback
- 'Plug-and-Play' door protection



A VANTAGE Company



A VANTAGE Company

6500 Gottardo Court
Mississauga, ON L5T 2A2
Ph: 416.747.7967
Fax: 41-747.9035
info@galcanada.com
www.galcanada.com



50 E. 153rd St.
Bronx, NY 10451-2104
Ph: 718.292.9000
Fax: 718.292.2034
info@gal.com
www.gal.com

REGIONAL SERVICE CENTERS

Miami – 877.241.9354
Chicago – 877.300.5830
Los Angeles – 877.300.5816
New York – 347.226.4555
Toronto – 888.425.2262

STANDARD FEATURES

- Quick and easy LED display keypad programming allows complete control for all speeds, torques, acceleration, and deceleration
- Download operating parameters for one operator for easy upload to others, great for multi-car banks
- Electronic door position optical cams with sequential lights displaying speed and door positions
- Over current re-open and DPM fault monitor signals
- Universal inputs accept control signals from dry contacts to signal voltages from 12-230 V, AC or DC
- Output contacts including door open limit, door close limit, re-open signal, and DPM signal are rated at 230V, 10 amp AC
- Portable PU04 unit lets you easily modify preset parameter values, capable of holding 5 complete sets (1 working set, 4 defaults)
- Available for left- and right-hand doors (center-parting doors use a variation of the left-hand door operator)
- Drives Available: 220 VAC/115 VAC

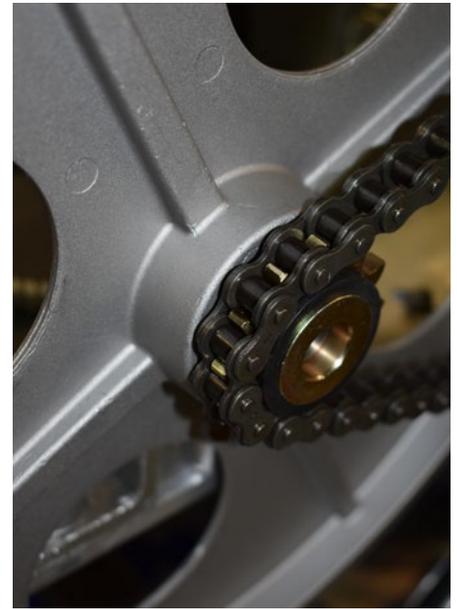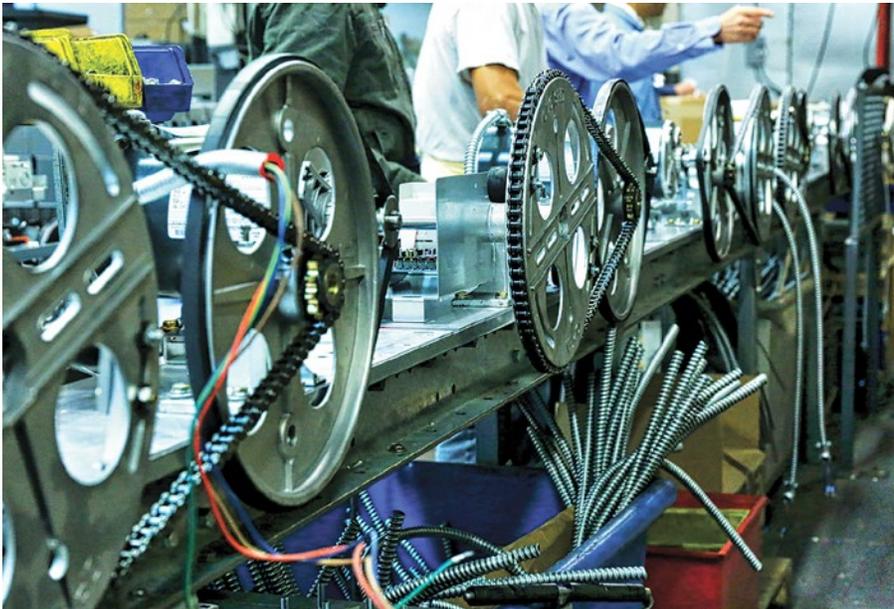

OPTIONAL FEATURES

- Optional 'heavy door' input to maximize door performance and still meet the kinetic energy requirements found in ASME A17.1 - 2000 + codes
- Water-resistant model available: Controls encased in a gasketed housing, motor rated for 'wash down' duty, water-resistant grommets for wiring
- GAL offers Formula Systems and Tri-tronics edges which plug directly into MOVFR Operator, saving hours on installation