

BL SERIES



The **BL Light** pushbutton is a stamped shot-peen stainless finish with LED illumination. The tactile symbol and perimeter illuminate on activation.

- ✓ Studless Mounting
- ✓ Round or Square, with or without tactile
- ✓ Shot-peen anti-fingerprint stainless steel
- ✓ LED Illumination available in Red, Green, Blue, White & Amber



SS#4 COP shown with 7" Mosaic TFT PI, BS classic pushbutton, Julius surface mount and surround, 2010 code with service cabinet

Available Options



California



Single Illumination



Double Illumination

General Details

General: Vandal Proof Studless Frontal Mounting Stainless Steel Pushbutton. Fastened by jam-nut on plates from 11 to 22 Gauge thick.

Pressel: AISI 303 turned Stainless Steel (standard or PVD-coated finishes) Pressel activation is limited by by Stainless Steel base in Pressel. This prevents any stress on contact block resulting in an extremely robust vandal-proof pushbutton.

Contacts: Available with one or two microswitch(es)


Wiring: Screw terminals or JST Pin Connector

Illumination: LED-illumination of target in Red, Green, Blue, White and Amber


Stroke: 0.040"

Avg. Life: 1,500,000 activations

Degree of protection: IP54




Physical Characteristics

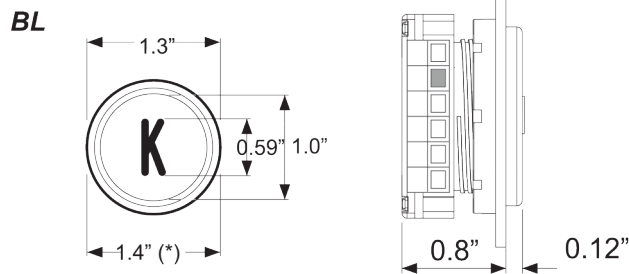


Mounting Requirements

Cutout



Minimum Spacing



Component Ordering Information

Complete Assembly

BL X V F X X X X .XX

Style

S- Round

Q- Square

Finish

V- Pearl SS

Contact

0- No contact

3- 1 Contact (Microswitch)

4- 2 Contact (Microswitch)

Voltage

4 - 24V AC/DC


M - Multivolt 6V-120V AC/DC

0 - No Illumination

Marking

00- Blank

02- '2'

AL- 

etc...

Illumination

0 - No Illumination

A - Amber

B - Blue

R - Red

G - Green

W - White

Wiring

M - Screw Terminals

C - JST Connector

Pressel & Bezel Only

BL X V F 3 0 0 0 .XX

Style

S- Round

Q- Square


Finish

V- Pearl SS

Marking

00- Blank

02- '2'

AL- 

etc...

Contact Only

BS 0 0 0 X X X X .00

Contact

0 - No Contact

3 - 1 Contact (Microswitch)

4 - 2 Contact (Microswitch)

Voltage

4 - 24V AC/DC

M - Multivolt 6V-120V AC/DC

0 - No Illumination

Illumination

0 - No Illumination

A - Amber

B - Blue

R - Red

G - Green

W - White

Wiring

M - Screw Terminals

C - JST Connector

This publication is for general informational purposes only. Product design is subject to change without notice. Actual product colors and finishes may vary.

Copyright © 2020 MAD Elevator Inc.

vantageelevation.com
(347) 226-4558
sales@vantageelevation.com