# BP SERIES






**The BP Series** pushbuttons is vandal-proof, machine-turned stainless steel with an illuminated central target. Buttons may be paired with a large selection of Braille tags combine aesthetics and accessibility.

- ✓ Studless Mounting
- ✓ Vandal-proof
- 🖌 Stainless Steel or PVD Brass, non-tarnishing finish
- 🖊 LED Illumination available in Red, Green, Blue, White & Amber



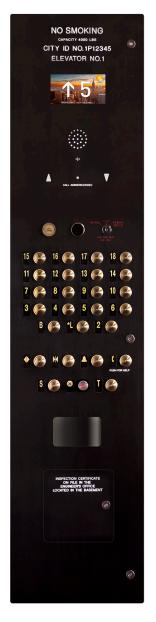

Oil Rubbed Finish COP shown with 7" Mosaic TFT PI, BP Classic Pushbutton, Plaza Slimline flush mount tactile, 2000 code with service cabinet

## Available Options



Classic

#### General Details

General: Vandal Proof Studless Frontal Mounting Stainless Steel Pushbutton. Fastened by jam-nut on plates from 11 to 22 Gauge thick.

Pressel: AISI 303 turned Stainless Steel (standard or PVD-coated finishes) Pressel activation is limited by Stainless Steel base in Pressel. This prevents any stress on contact block resulting in an extremely robust vandal-proof pushbutton.

Contacts: Available with one or two microswitch(es)

Wiring: Screw terminals or JST Pin Connector

Voltage: Multivolt: 6V to 120V AC/DC, 24V AC/DC

0.20'

Illumination: LED-illumination of target in Red, Green, Blue, White and Amber

Stroke: 0.040"

Classic

Avg. Life: 1,500,000 activations

Degree of protection: IP54

### Physical Characteristics



#### Ň Cutout 0.83 1.57" Minimum Spacing 2.75 Adaptor ring for Ø 1.38" Cutouts **Component Ordering Information** —2.5"— ► Pressel & Bezel Only Contact Only

Mounting Requirements



This publication is for general informational purposes only. Product design is subject to change without notice. Actual product colors and finishes may vary.

Copyright © 2020 MAD Elevator Inc.

vantageelevation.com (347) 226-4558 sales@vantageelevation.com